

Railings

GS-48

Categories (UNE 85238:91)

- Soft body dynamic test of large dimensions.
- Dynamic test of hard body.
- Static horizontal test to the outside
- Horizontal static test inwards
- Security test


Complies with CTE (DB SU-1 and DB SE-AE) for the following categories up to 0.8 kN / m

Zones A, B, C1 (except A, B, D), C2, (except A, B, D) D, G.


Complies with CTE (DB SU-1 and DB SE-AE) for the following categories up to 1.6 kN / m

Areas A, B, C1 to C4 (except A, B, D), D, E (<30kN), F, G.

Colors

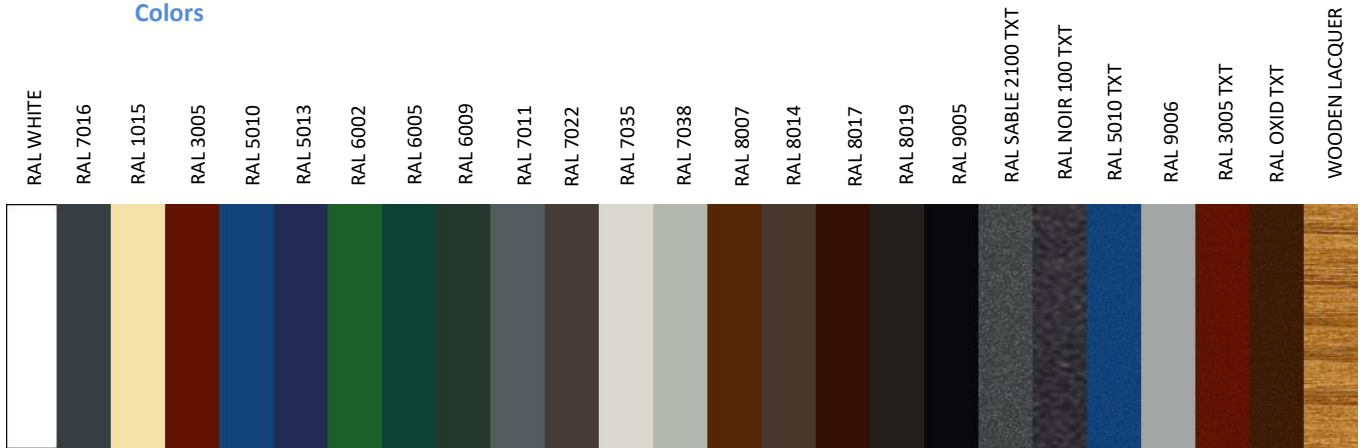

Section detailed

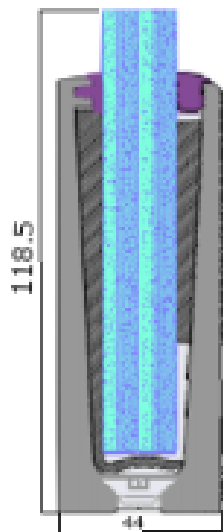

Anchorges

Type FAZ or BAZ of M12x103, A4 each 220mm and 60mm of the ends

Hollow for glass

From 20,5mm to 21mm

Glasses

Various

Height

Until 1110

Bars

Various

